

OUTDOOR LIVING






Framee is sliding glass system with fine-framed double glazed panels

System is made of fine-framed aluminum profiles with modern design & suitable especially for largearea applications and completed with stylish and functional accessories perfectly matching with modern architectural living spaces. System offers a comfortable sliding with silent movement and allows individual sliding panels to be moved horizontally to one side or both in parallel.

Framee provides reinforced profile designs for customized static values, condensated frame profile design as well as glazing up to 26mm thickness.

System is ease of install with compact connection details.




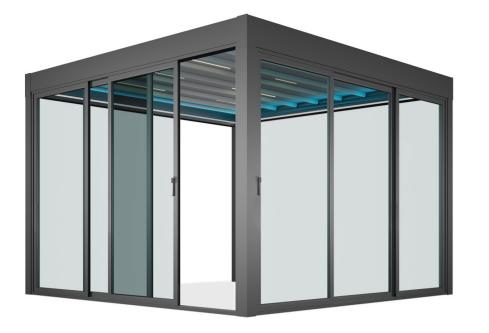







rev. 6-05/2021

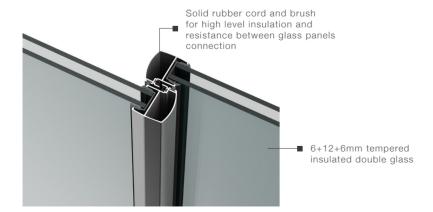



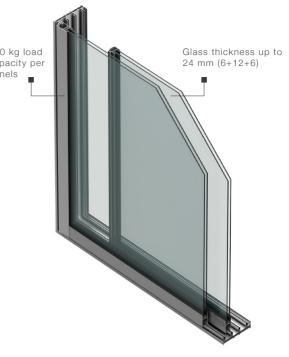






optimum and smooth running sliding with wide glass panes

Stainless steel bottom rail for easy and smooth movement

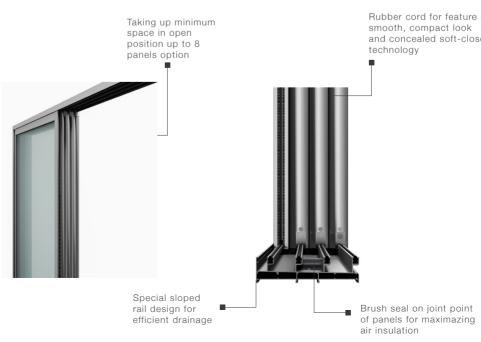



air insulation



Adjustable panel height up to 8mm

SUNTECH








Technical Specifications	Measurements	
System Depth  Air Permeability	Frame Sash	81,7/112,6/181,7 mm 38 mm
	Opening Sash	24 mm

 $<sup>^{\</sup>ast}$  Take double glazing thickness tolerances into consideration.



	Performance Criteria	Classification	Test Standards
:0:	Thermal Transm. Coeff.*	-	-
=	Air Permeability	Class 8A (450 Pa)	EN 1026 EN 12207
$\bigcirc$	Water Tightness	Class 4 (600 Pa)	EN 1027 EN 12208
<b>○</b> ♣	Resistance to Wind	Class B2 (800 Pa)	EN 12210

### Handles & Lock Positions

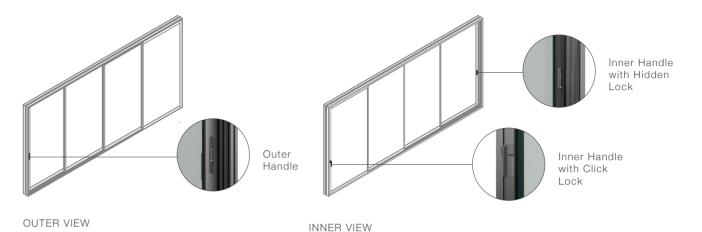


#### Handles & Lock Types










Section Details

Inner Handle

with Hidden

Lock



100

Section Details 1,4 mm<sup>26</sup> mm

Outer Handle

# Anodising Brushed Color Options



From natural and metallic to anodizing brushed color options give a sleek and elegant finish to systems.



rev. 6-05/2021

<sup>\*</sup> Special condensation calculations for the project were seperately carried out.
\*\* Please contact us to obtain reports that cantain the relevant performance values.



## Technical Details



6+12+6 mm insulated double glass	
or 12 to min inductor double glade	
2,3 or 4 panels single slide 4,6 or 8 panels double slide	
6000 mm	
7000 mm	
3000 mm	
240 kg	
Frame 81 mm Sash 38 mm	
Electrostatic powder-coating	
Manual	
included	
included	
included	

www.umbraoutdoorliving.com.au info@umbraoutdoorliving.com.au 040 339 88 19





