


# In-Slab Heating

# COLDBUSTER *floor heating*




The ideal choice for heating **polished concrete** and also suitable for other floor finishes.



Our in-slab heaters are designed to be **secured onto the reinforcement grid**. The slab is then poured on top.



The heaters, in combination with our smart programmable thermostats, **ensure heating efficiency and economical running costs**.



The concrete slab will **retain and slowly release heat over an extended period of time**, even once the heater is turned off.




# Configuration

Coldbuster In-Slab Heaters are rated at 30W per linear meter and supplied as a cable on a reel. The 6.5mm thin cable is designed with durability in mind and comes with a 20 year warranty.

They are single ended with a twin conductor element and a single 3m long cold tail to connect to a programmable or manual thermostat.

The heaters come in a range of 13 standard lengths and can be combined in order to heat larger areas.

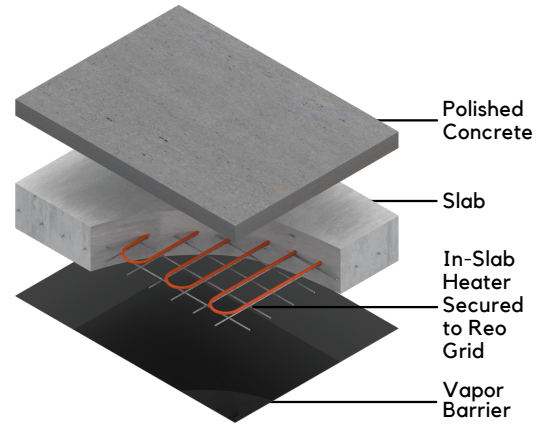


# Installation

Coldbuster recommends a cable spacing of 200mm, which is usually the distance between reinforcement rods.

Start by marking out permanent fixtures and planning your heater layout to ensure that it will fit properly.

Secure the heater cable to the reinforcement grid, according to your planned layout, using cable ties. It is best to secure the heater on the underside of the reo grid for extra protection

**NEVER cut or cross over heater cables!**

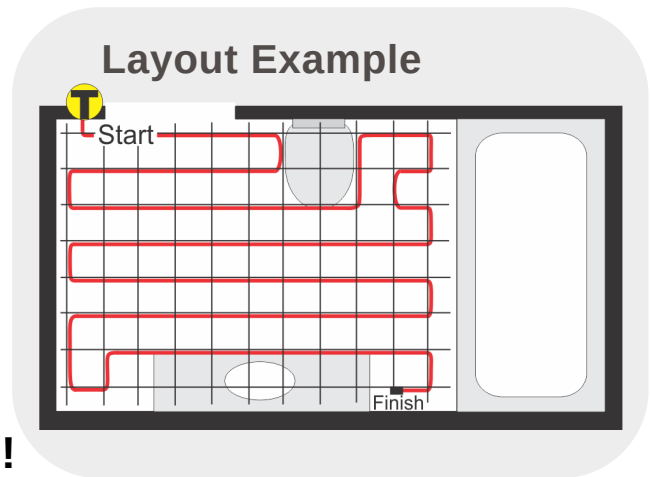

# Specification

Product Code	Length	Watts	Amps	Heater Size (m <sup>2</sup> )
SLK0300	10.0m	300W	1.3A	up to 2.0
SLK0600	20.0m	600W	2.5A	4.0
SLK0900	30.0m	900W	3.8A	6.0
SLK1200	40.0m	1200W	5.0A	8.0
SLK1500	50.0m	1500W	6.3A	10.0
SLK1875	62.5m	1875W	7.8A	12.5
SLK2250	75.0m	2250W	9.4A	15.0
SLK2625	87.5m	2625W	10.9A	17.5
SLK3000	100m	3000W	12.5A	20.0
SLK3375	112.5m	3375W	14.1A	22.5
SLK3750	125m	3750W	15.6A	25.0
SLK4125	137.5m	4125W	17.2A	27.5
SCK4500	150m	4500W	18.8A	30.0

### Heater kit includes:

- In slab heater
- Installation monitor with battery
- Installation manual
- 20 year warranty



Energy Efficient



RoHS Compliant



UL US Compliant



20 Year Warranty



European Conformity



IPX7



TUV NORD Compliant

### Head Office:

8/81 Frenchs Forest Rd E  
Frenchs Forest NSW 2086

### For Free Quote Australia-Wide:

Call: 1800 85 75 65  
Email: sales@coldbuster.com.au

### Find Us Online:

Website: [www.coldbuster.com.au](http://www.coldbuster.com.au)  
LinkedIn: @coldbusterfloorheating  
Facebook: @coldbusterfloorheating  
Instagram: @coldbusterfloorheating