

# **Electric Showers**

The Perfect Solution for a Remote Shower!



Instantaneous hot water showers. Ideal for baches, offices & remote bathrooms. No hot water cylinder required.





### Smart Remote Solutions

Installing a continuous flow electric shower is the perfect solution for remote bathrooms and situations where there can be unpredictable demands for hot water, making them ideal for baches, offices and sports clubs.

With Triton electric showers, water is heated instantly on demand, so you'll never run out of hot water and you'll only pay for what hot water you use.

There's no need for a hot water cylinder and long runs of pipe which can waste water and result in heat losses. Therefore there is no stored water, saving on precious space and improving the affordability even further.

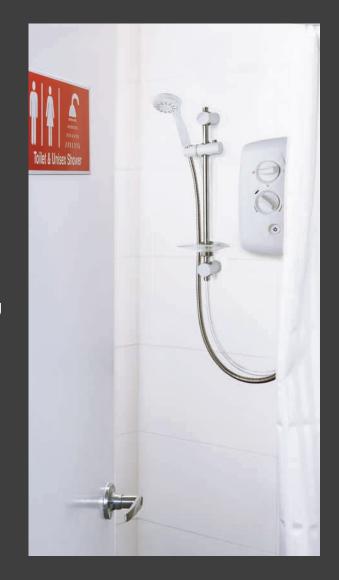

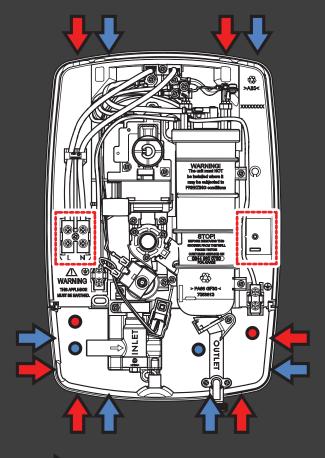



Multiple cable entry points



Multiple water entry points

## Smart Installation

The T80Z Electric heating elements located in the main unit operate at a constant rate at your chosen power setting. The rate of the water passing through the heater determines the water temperature. The slower the flow the hotter the water becomes; the faster the flow, the cooler the water.

During winter the mains water supply will be cooler than in summer, so the flow rate will vary between seasons at any one temperature setting.

Therefore at different times of the year you may have to adjust the position of the temperature control/dial to maintain your desired water temperature.

### The Range

#### T80Z Fast-Fit Electric Shower







The T80Z Fast-Fit has multiple cable and water entry points located to the left and right side of the unit ensure easy fitting.

- Ideal size and shape for replacement installations
- Rub clean shower head with five different spray patterns
- Stylish riser rail kit with adjustable fixing brackets
- Push button Start/ Stop to select your favourite shower setting every time
- Swing-Fit<sup>™</sup> Terminal for left and right cabling
- Swivel-Fit<sup>™</sup> A 180° fully reversible swivel water inlet that accommodates water connections from either the left or right hand side of the unit to aid installation




#### T60X Electric Shower










- Low pressure indicator operates when the water pressure is insufficient
- Separate power and temperature control dials

indicator provide functionality to this shower.

- Rub clean shower head Single spray pattern
- Two year parts and labour guarantee

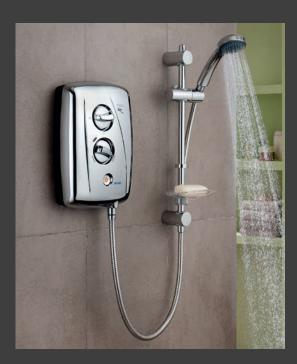





#### **Installation Guidelines**

Only connect unit to a 230v - 240v AC supply.


The electrical supply must be adequate for the loading of unit and existing circuit.


The shower must be connected to its own independent electrical circuit

An isolation valve must be fitted in a convenient position in the supply pipe to allow the shower to be serviced.

#### **Important**

We recommend all TRITON shower installations be carried out by qualified tradespeople, and in accordance with the NZ Building code, trade regulations and the TRITON installation guide.

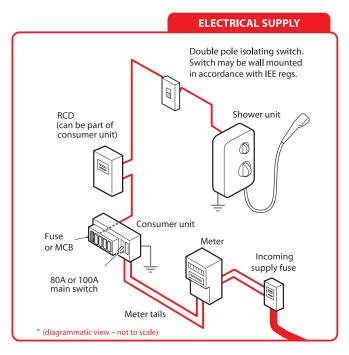

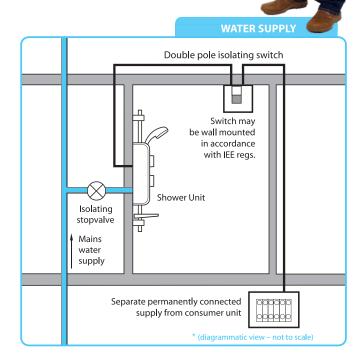

|   | T80Z Fast-Fit   |                | T60X   |
|---|---|----------------|--|
| Product Code  | T80 Fast Fit W  | T80 Fast Fit C | T60X   |
| Finish  | White   | Chrome         | White  |
| Temperature Control                                 | Stabilised  |                | Stabilised                                   |
| Power Ratings at 230v                               | 8.7kW 38amps - IPX4 rated   |                | 6.4kW 28amps - IPX4 rated                    |
| Inlet Connection                                    | 15mm compression  |                | 15mm compression                             |
| Water Entry Points                                  | Top, bottom, side bottom, back (left side of unit)<br>Top, bottom, side bottom, back (right side of unit) |                | Top, bottom, back                            |
| Cable Entry Points                                  | Top, bottom, back (left or right side of unit)<br>Bottom, back (right hand side of unit)                  |                | Top, bottom, back                            |
| Outlet Connection                                   | 1/2" BSP  |                | 1/2" BSP                                     |
| Plumbing System                                     | Cold water only   |                | Cold water only                              |
| Max Inlet Temp                                      | 28°ℂ  |                | 28℃  |
| Min Inlet Temp                                      | 2°C   |                | 2°C  |
| Minimum Running Pressure/Flow for full performance* | 1.0 Bar @ 8 l/min   |                | 1.0 Bar @ 8 l/min                            |
| Maximum Static Pressure                             | 10 Bar  |                | 10 Bar                                       |
| Surface Mounted Only                                | $\checkmark$  |                | $\checkmark$                                 |
| Approvals, Complies with                            | AS/NZS60335.2.35, EMC BEAB, CE, BSI Kitemark  |                | AS/NZS60335.2.35, EMC BEAB, CE, BSI Kitemark |
| Warranty  | 2 years domestic  |                | 2 years domestic                             |



