
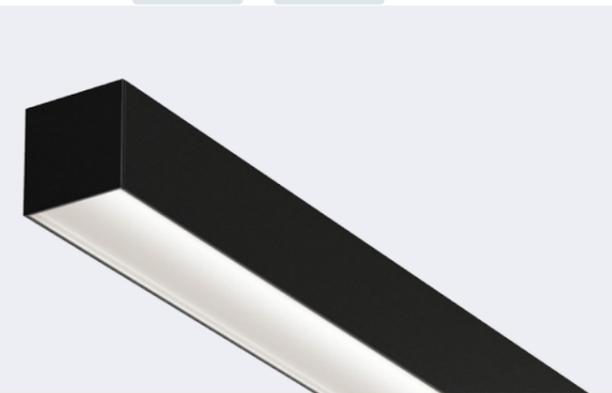


TYKE

CREATIVE

The Tyke Linear Range of luminaires has been developed on the basic principles of creativity and playfulness. Modular connections allow for unique configurations that are limited only by your imagination. Tyke delivers customised, high performing and human centric lighting solutions across every environment.

TYKE  
/ creative light /

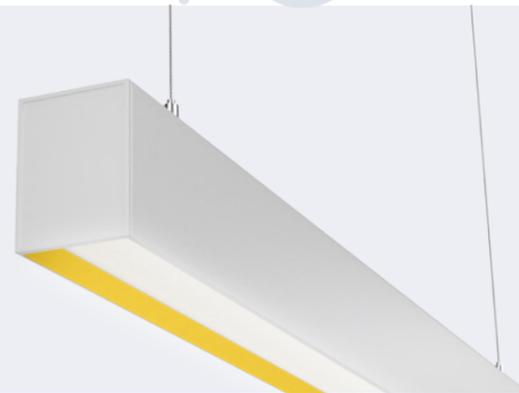

# RIDGE

series

The Ridge is a streamlined, elegant connectable linear system with modular configurations that deliver limitless design possibilities.

### DIMENSIONS

78mmW x 102mmH

### INSET MODULES



Prismatic



Opal



Baffle

# NIXON

series

The Nixon is a fully connectable linear system with sleek modern proportions. Completely customisable this series delivers creative solutions across all environments.

### DIMENSIONS

62mmW x 82mmH

### INSET MODULES



Prismatic



Opal



Baffle

# HARLEY

series

The Harley Series offers sophisticated recessed linear profile with direct light distribution. A range of dimensions are designed to enhance retail and commercial spaces.

### DIMENSIONS

**56** 56mmW x 32mmH

**75** 75mmW x 37mmH

**90** 90mmW x 42mmH

# CUSTOM

series

The Custom Series delivers infinite design solutions with a range of profiles and LED ribbon tailored for a wide variety of environments.

### DIMENSIONS

**TC13** 16mmW x 10mmH

**TC16** 17.1mmW x 15mmH

**TC24** 35.2mmW x 34.9mmH

**TC35** 35mmW x 35mmH



**RIDGE**  
series

The Ridge is a streamlined, elegant connectable linear system with slim proportions. A 78x102 dimension with opal, prismatic and baffle optics produces a variety of design possibilities. The Ridge can be surface mounted or suspended in a range of colours and connections to create stunning office and commercial environments.



# RIDGE Series

START...>


1

## CHOOSE YOUR INSET

The Ridge Series offers a range of modular optics designed to deliver human centric lighting outputs.

### Prismatic

A pattern of prism-like shapes with triangular bases easily disperses light and provides excellent glare reduction properties (UGR <19).

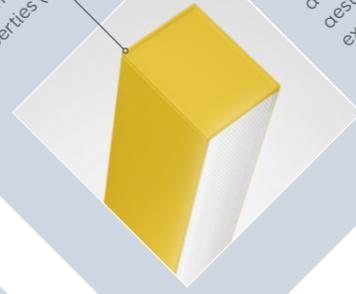


### Baffle

The Baffle optic delivers excellent glare control and a clean line of light.



### Opal

Opal optics provide a clean looking aesthetic and extremely efficient diffusion of light.

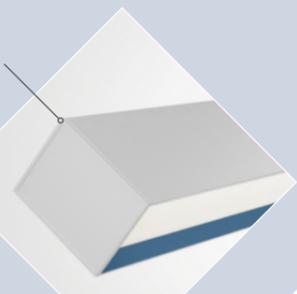

## CHOOSE YOUR CONFIGURATION

3


### Direct/Indirect

Depending on what you choose to feature, the Ridge Series is versatile and has both up and down directional light.



### Connect

The Ridge Series has a number of modular connection options giving you the freedom to create free-flowing shapes and lines.

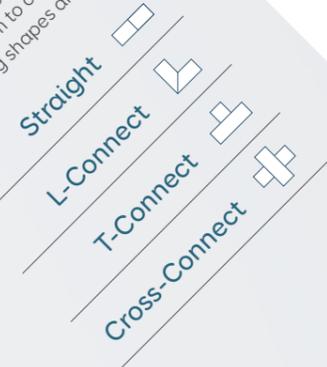


## 2 PICK YOUR COLOUR

\*Dulux Colours of New Zealand



A broad range of colour options will breathe life into any environment without limiting your creativity. Outside of our standard options we can provide custom colours on request.

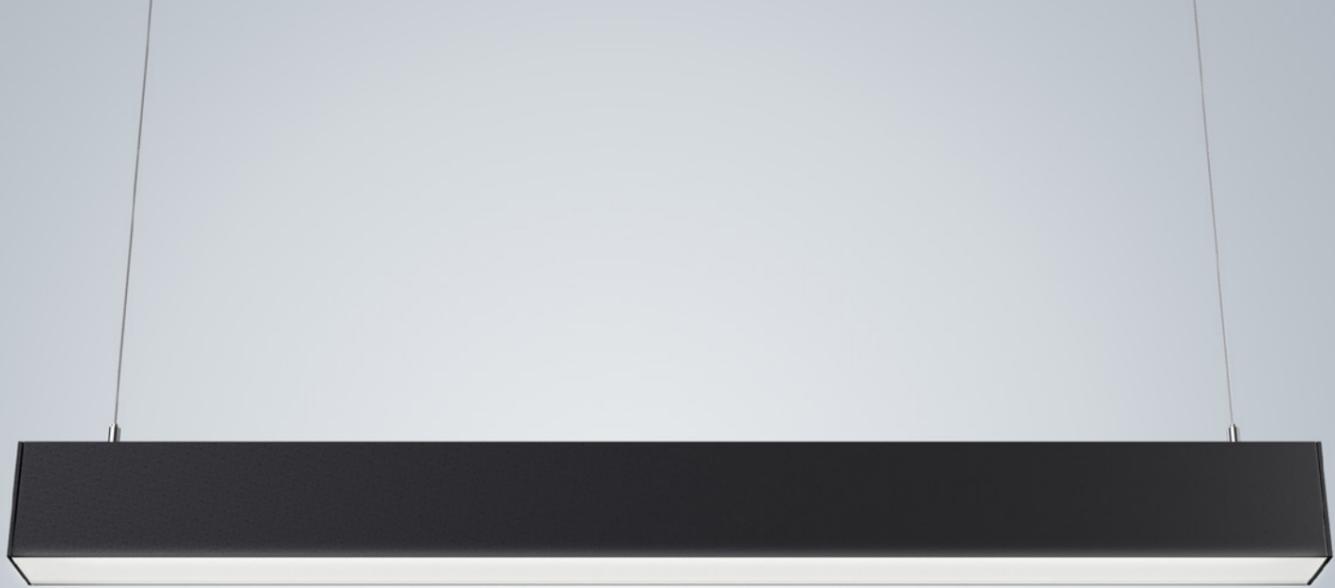

## RIDGE SERIES

### TECHNICAL FEATURES

**Light Source** Samsung LED  
**Luminaire Efficacy** 80-90 lm/W  
**Chromaticity Tolerance (Initial MacAdam)** 3  
**Rated Median Useful Life\*** 50000h L70 at 25°C  
**Ballast** 1x Lifud (5 Year Warranty)  
**Maintenance Category** D - Enclosed IP2X

### CUSTOM FEATURES

**Optics** Opal/Prismatic/Baffle  
**Light Distribution** Direct and Direct-Indirect  
**Mounting Options** Suspended/Surface Mount  
**Colour Rendering Index min.** 80  
**Correlated Colour Temperature\*** 2700-6000k  
**Dimming** 0-10v,DALI  
**Linkable** Power and Mechanically Linkable  
**Colours** White, Black, Aluminium, Lawrence, Mission Bay, Rangitikei River, Custom

	Suspension Mount		Straight Connection
	Surface Mount		L Connect
	Ceiling Rose		T Connect
	End Cap		Cross Connect



### DIRECT ILLUMINATION

Width/Height	Length	Power
78x102	573mm	15
78x102	853mm	22
78x102	1133mm	30
78x102	1413mm	38
78x102	1693mm	45
78x102	1793mm	52
78x102	2253mm	60
78x102	L Connect	15
78x102	T Connect	15
78x102	Cross Connect	15

### DIRECT/INDIRECT ILLUMINATION

Width/Height	Length	Power
78x102	573mm	22.5
78x102	853mm	33
78x102	1133mm	45
78x102	1413mm	57
78x102	1693mm	67.5
78x102	1793mm	78
78x102	2253mm	90
78x102	L Connect	22.5
78x102	T Connect	22.5
78x102	Cross Connect	22.5



# NIXON

series

The Nixon is a fully connectable linear system with sleek modern proportions. Available in both direct and indirect options with a 62x82mm dimension. Completely customisable in colour and through multiple connection options this system delivers endless creative possibilities.

# NIXON series

START... ↘

1

## CHOOSE YOUR INSET

The Nixon Series offers a range of modular optics designed to deliver human centric lighting outputs.



### Prismatic

A pattern of prism-like shapes easily disperses light and provides excellent glare reduction properties (UGR <math>< 19</math>).



### Baffle

The Baffle optic delivers excellent glare control and a clean line of light.

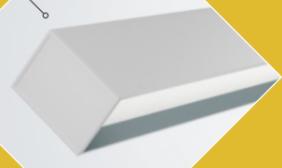
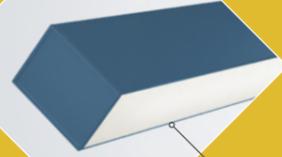


### Opal

Opal optics provide a clean looking aesthetic and extremely efficient diffusion of light.

## 2 PICK YOUR COLOUR

Dulux Colours of New Zealand®

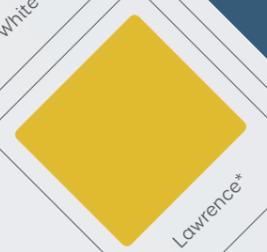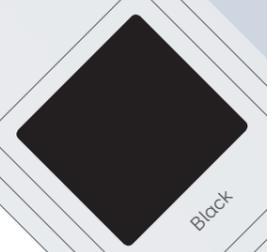

A broad range of colour options will breathe life into any environment without limiting your creativity. Outside of our standard options we can provide custom colours on request.

## 3 CHOOSE YOUR CONFIGURATION


**Direct/Indirect**  
Depending on what you choose to feature, the Ridge Series is versatile and has both up and down directional light.

3

### Connect

The Nixon Series has a number of modular connection options giving you the freedom to create free-flowing shapes and lines.



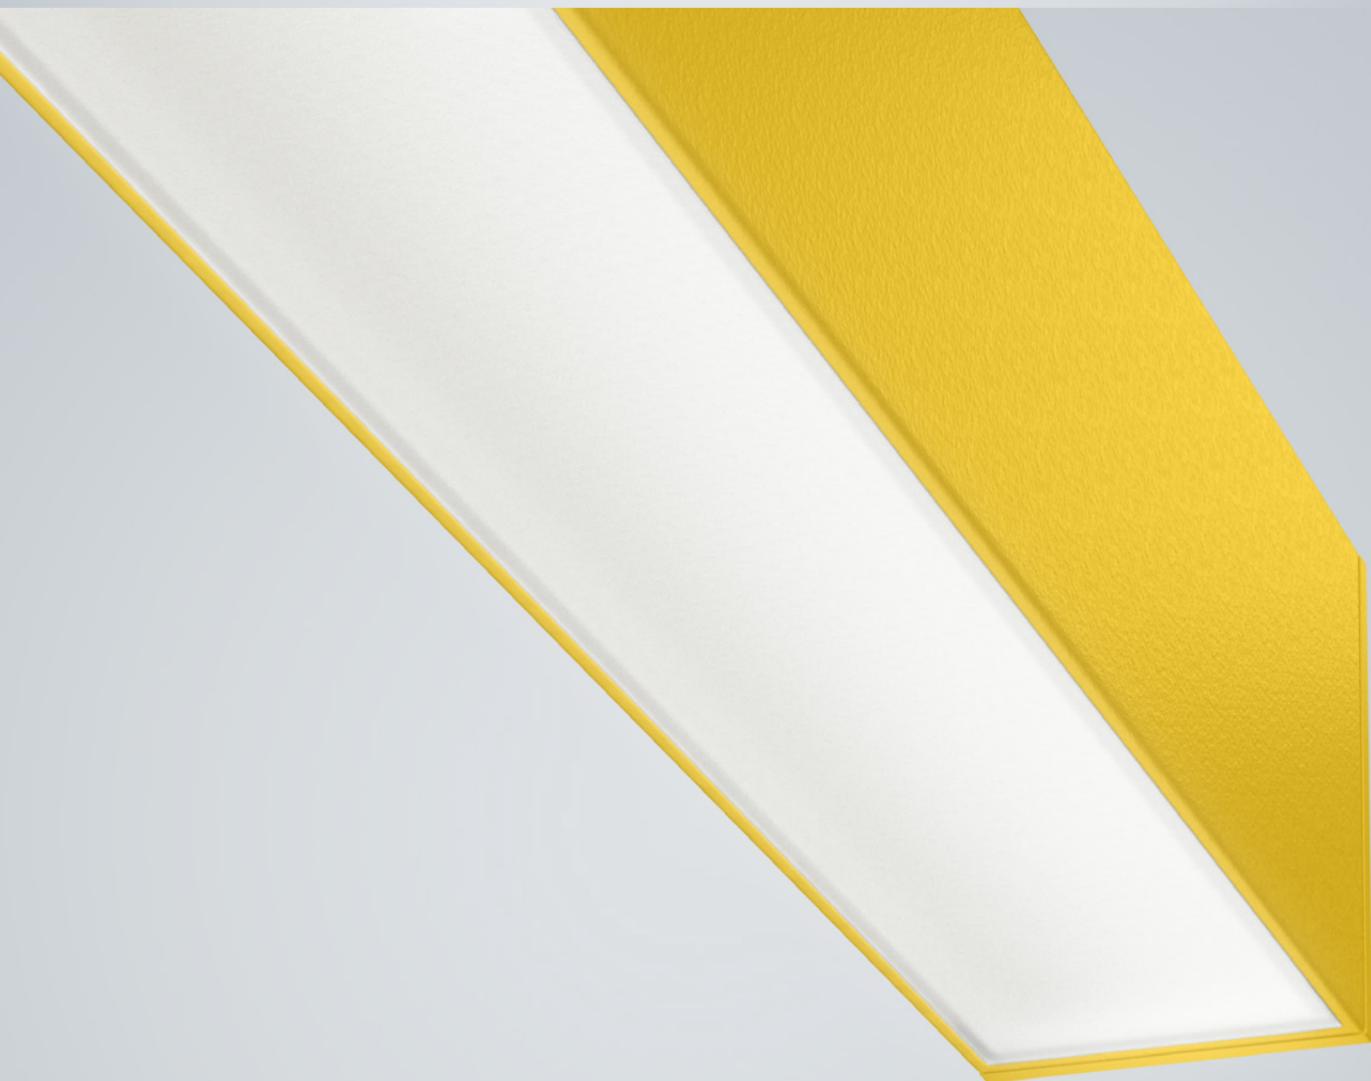

## NIXON SERIES

### TECHNICAL FEATURES

**Light Source** Samsung LED  
**Luminaire Efficacy** 80-90 lm/W  
**Chromaticity Tolerance (Initial MacAdam)** 3  
**Rated Median Useful Life\*** 50000h L70 at 25°C  
**Ballast** 1x Lifud (5 Year Warranty)  
**Maintenance Category** D - Enclosed IP2X

### CUSTOM FEATURES

**Optics** Opal/Prismatic/Baffle  
**Light Distribution** Direct and Direct-Indirect  
**Mounting Options** Suspended/Surface Mount  
**Colour Rendering Index min.** 80  
**Correlated Colour Temperature\*** 2700-6000k  
**Dimming** 0-10v,DALI  
**Linkable** Power and Mechanically Linkable  
**Colours** White, Black, Aluminium, Lawrence, Mission Bay, Rangitikei River, Custom

	Suspension Mount		Straight Connection
	Surface Mount		L Connect
	Ceiling Rose		T Connect
	End Cap		Cross Connect



### DIRECT ILLUMINATION

Width/Height	Length	Power
62x82	573mm	15
62x82	853mm	22
62x82	1133mm	30
62x82	1413mm	38
62x82	1693mm	45
62x82	1793mm	52
62x82	2253mm	60
62x82	L Connect	15
62x82	T Connect	15
62x82	Cross Connect	15

### DIRECT/INDIRECT ILLUMINATION

Width/Height	Length	Power
62x82	573mm	22.5
62x82	853mm	33
62x82	1133mm	45
62x82	1413mm	57
62x82	1693mm	67.5
62x82	1793mm	78
62x82	2253mm	90
62x82	L Connect	22.5
62x82	T Connect	22.5
62x82	Cross Connect	22.5



# HARLEY

series

The Harley is a sophisticated recessed linear profile with direct light distribution. A range of dimensions are designed to enhance retail and commercial spaces. Its applications are diverse - in ceilings, washing down walls or wall mounted.



## HARLEY 56

### TECHNICAL FEATURES

**Light Source** Samsung LED  
**Luminaire Efficacy** 80-90 lm/W  
**Colour Rendering Index min.** 80  
**Chromaticity Tolerance (initial MacAdam)** 3  
**Rated Median Useful Life\*** 50000h L70 at 25°C  
**Ballast** 1x Lifud (5 Year Warranty)  
**Maintenance Category** D - Enclosed IP2X

### CUSTOM FEATURES

**Optics** Opal  
**Light Distribution** Direct  
**Mounting Options** Recessed  
**Correlated Colour Temperature\*** 2700-6000k  
**Dimming** 0-10v, DALI  
**Linkable** Power and Mechanically Linkable  
**Colours** White, Black, Anodised Aluminium, Custom



### DIRECT ILLUMINATION

Width/Height	Length	Power
56x32	868mm	22
56x32	1148mm	30
56x32	1428mm	38
56x32	1708mm	45
56x32	1988mm	52
56x32	2268mm	60

## HARLEY 75

### TECHNICAL FEATURES

**Light Source** Samsung LED  
**Luminaire Efficacy** 80-90 lm/W  
**Colour Rendering Index min.** 80  
**Chromaticity Tolerance (initial MacAdam)** 3  
**Rated Median Useful Life\*** 50000h L70 at 25°C  
**Ballast** 1x Lifud (5 Year Warranty)  
**Maintenance Category** D - Enclosed IP2X

### CUSTOM FEATURES


**Optics** Opal  
**Light Distribution** Direct  
**Mounting Options** Recessed  
**Correlated Colour Temperature\*** 2700-6000k  
**Dimming** 0-10v, DALI  
**Colours** White, Black, Anodised Aluminium, Custom



### DIRECT ILLUMINATION

Width/Height	Length	Power
75x37	882mm	22
75x37	1162mm	30
75x37	1442mm	38
75x37	1722mm	45
75x37	2002mm	52
75x37	2282mm	60



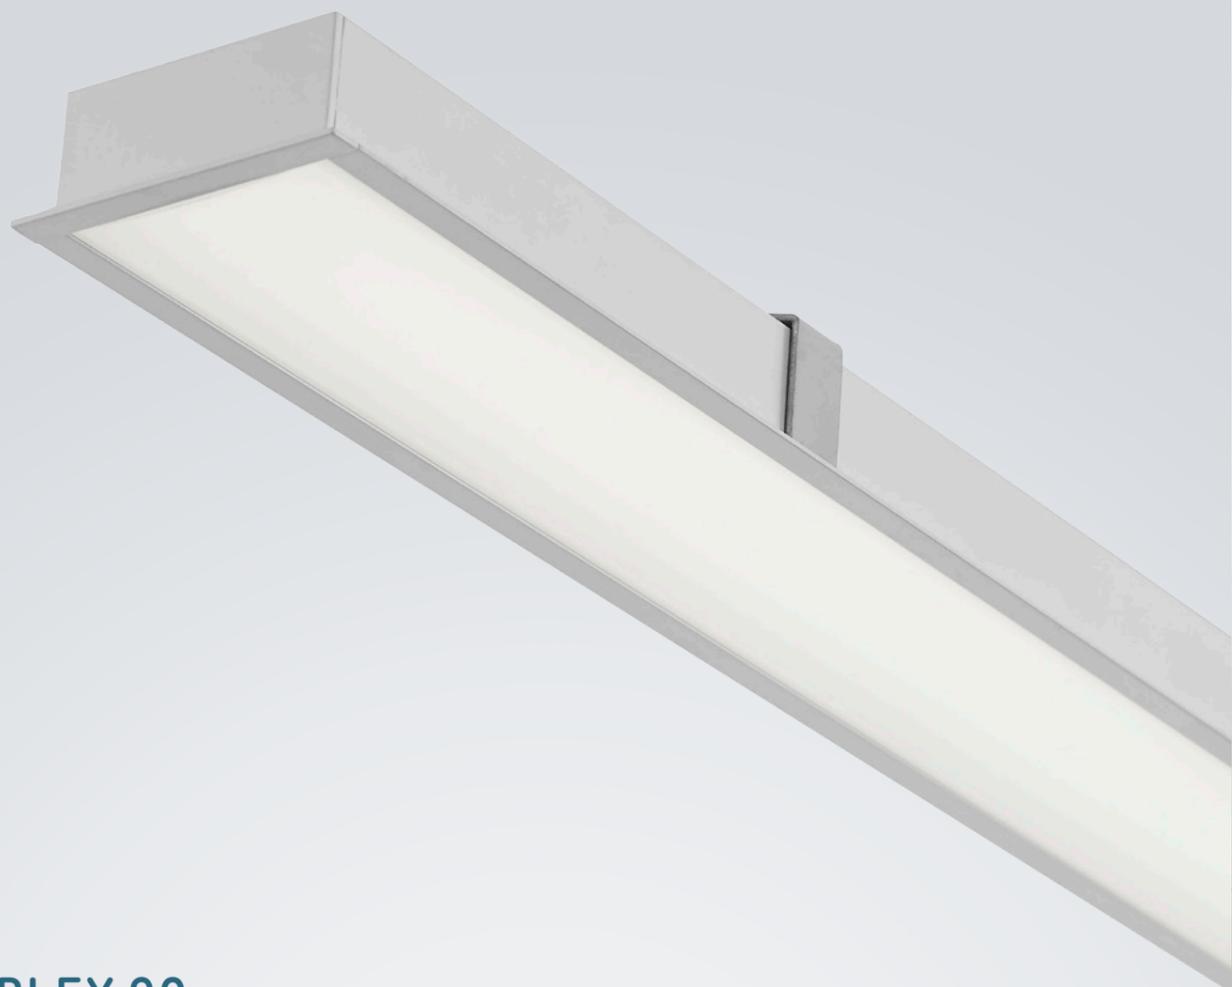

## HARLEY 90

### TECHNICAL FEATURES

**Light Source** Samsung LED  
**Luminaire Efficacy** 80-90 lm/W  
**Colour Rendering Index min.** 80  
**Chromaticity Tolerance (initial MacAdam)** 3  
**Rated Median Useful Life\*** 50000h L70 at 25°C  
**Ballast** 1x Lifud (5 Year Warranty)  
**Maintenance Category** D - Enclosed IP2X

### CUSTOM FEATURES

**Optics** Opal  
**Light Distribution** Direct  
**Mounting Options** Recessed  
**Correlated Colour Temperature\*** 2700-6000k  
**Dimming** 0-10v, DALI  
**Colours** White, Black, Anodised Aluminium, Custom

### DIRECT ILLUMINATION


Width/Height	Length	Power
90x42	882mm	22
90x42	1162mm	30
90x42	1442mm	38
90x42	1722mm	45
90x42	2002mm	52
90x42	2282mm	60





**CUSTOM**  
series

The Custom Series delivers infinite design solutions with a range of profiles and LED ribbon tailored for a wide variety of environments.

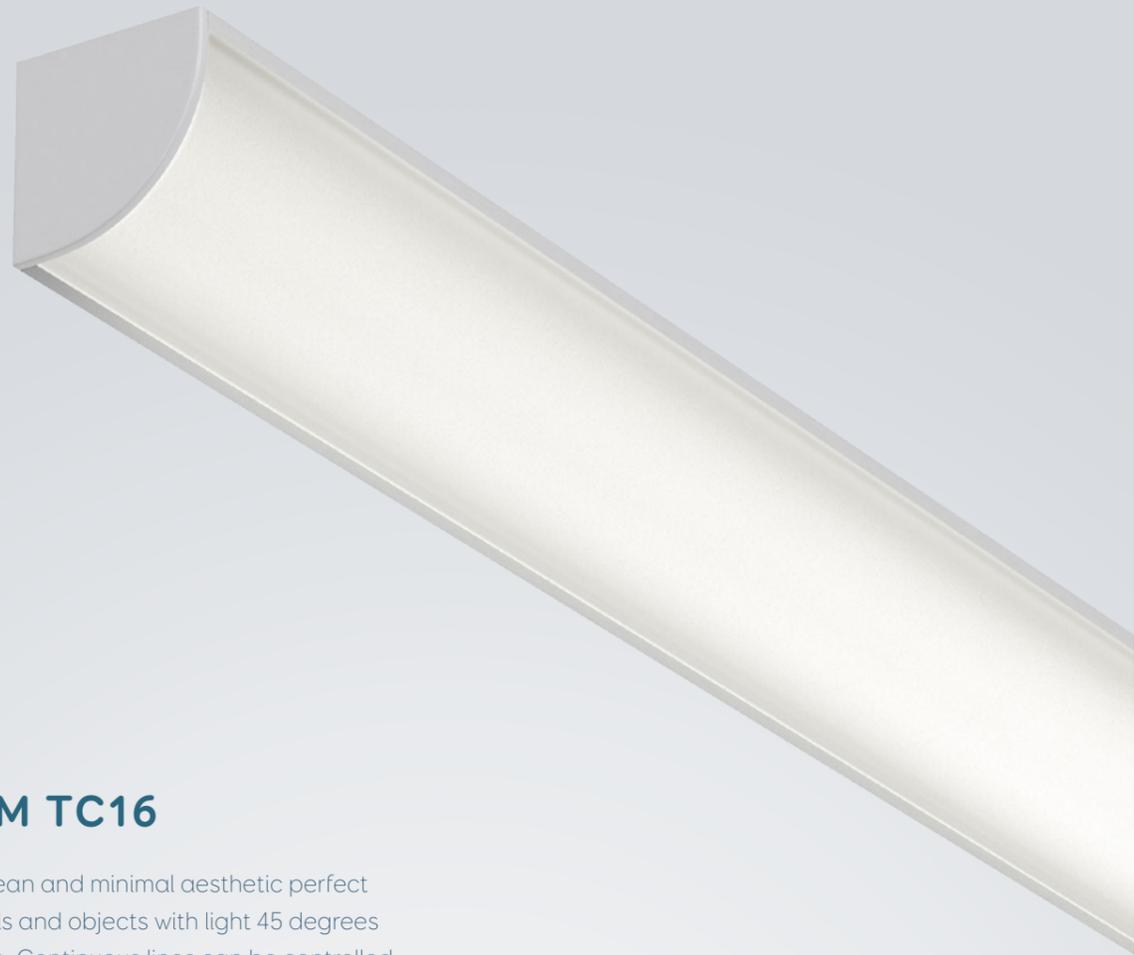

## CUSTOM TC13

TC13 provides direct illumination in customisable lengths. Continuous lines can be recessed or surface mounted. Dimming options are available.


### TECHNICAL FEATURES

**Optics** Opal  
**Light Distribution** Direct  
**Light Source** Samsung LED  
**Luminaire Efficacy** 80-90 lm/W  
**Colour Rendering Index min.** 80  
**Chromaticity Tolerance (initial MacAdam)** 3  
**Rated Median Useful Life\*** 50000h L70 at 25°C  
**Ballast** Meanwell (5 Year Warranty)



### CUSTOM FEATURES

**Cutting** Every 50mm  
**Structure** Flexible  
**Power** 9.6W/m-17W/m  
**Correlated Colour Temperature\*** 2700-6000k/RGB/RGBW  
**Dimming** 0-10v/DMX512/DALI  
**Maintenance Category** IP20/IP65  
**Colours** White, Black, Anodised Aluminium, Custom




## CUSTOM TC16

TC16 offers a clean and minimal aesthetic perfect for washing walls and objects with light 45 degrees from the surface. Continuous lines can be controlled with multiple dimming systems.


### TECHNICAL FEATURES

**Optics** Opal  
**Light Distribution** Direct  
**Light Source** Samsung LED  
**Luminaire Efficacy** 80-90 lm/W  
**Chromaticity Tolerance (initial MacAdam)** 3  
**Rated Median Useful Life\*** 50000h L70 at 25°C  
**Ballast** Meanwell (5 Year Warranty)



### CUSTOM FEATURES

**Cutting** Every 50mm  
**Structure** Flexible  
**Power** 9.6W/m-17W/m  
**Correlated Colour Temperature\*** 2700-6000k/RGB/RGBW  
**Dimming** 0-10v/DMX512/DALI  
**Maintenance Category** IP20/IP65  
**Colours** White, Black, Anodised Aluminium, Custom

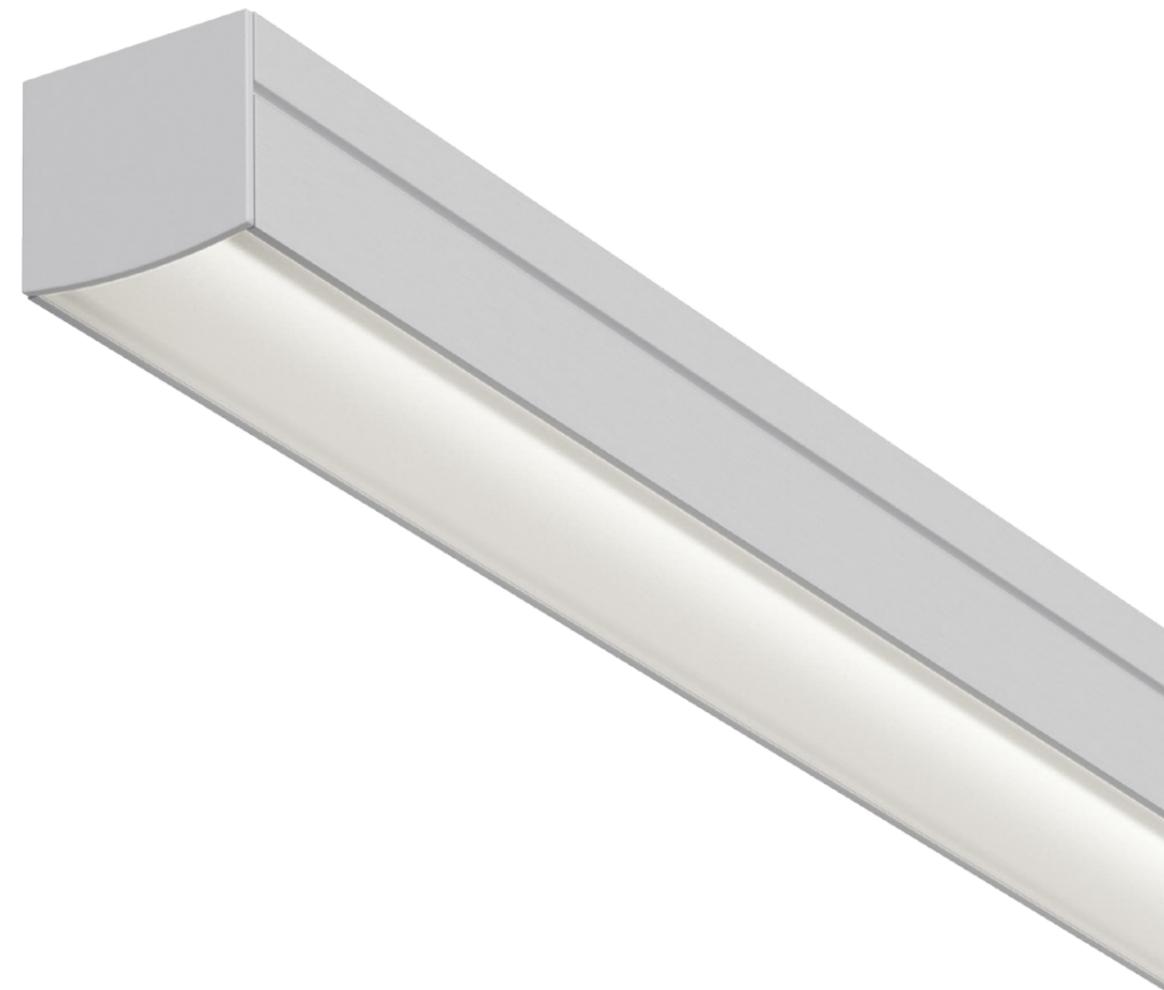

## CUSTOM TC24


TC24 delivers clean recessed lines of continuous light for walls and ceilings. Connection options allow for seamless light lines through 90 degree angles. Power density up to 34W/m.

### TECHNICAL FEATURES

**Optics** Opal  
**Light Distribution** Direct  
**Light Source** Samsung LED  
**Mechanically linkable for continuous runs**  
**Recessed via spring loaded clips**  
**Luminaire Efficacy** 80-90 lm/W  
**Colour Rendering Index min.** 80  
**Chromaticity Tolerance (initial MacAdam)** 3  
**Rated Median Useful Life\*** 50000h L70 at 25°C  
**Ballast** Meanwell (5 Year Warranty)

### CUSTOM FEATURES

**Cutting** Every 50mm  
**Recessed Corner Joints for continuous in wall/ceiling applications**  
**Structure** Flexible  
**Power** 9.6W/m-17W/m  
**Correlated Colour Temperature\*** 2700-6000k/RGB/RGBW  
**Dimming** 0-10v/DMX512/DALI  
**Maintenance Category** IP20/IP65  
**Colours** White, Black, Anodised Aluminium, Custom

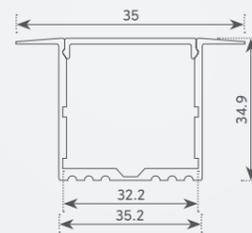

## CUSTOM TC35



TC35 is a versatile linear profile that can surface mounted or suspended to create multiple shapes and endless lines of light.

### TECHNICAL FEATURES

**Optics** Opal  
**Light Distribution** Direct  
**Light Source** Samsung LED  
**Mechanically linkable for continuous runs**  
**Luminaire Efficacy** 80-90 lm/W  
**Colour Rendering Index min.** 80  
**Chromaticity Tolerance (initial MacAdam)** 3  
**Rated Median Useful Life\*** 50000h L70 at 25°C  
**Ballast** Meanwell (5 Year Warranty)

### CUSTOM FEATURES

**Cutting** Every 50mm  
**Mounting** Surface/Suspended  
**Corner Joints for continuous wall/ceiling applications**  
**Structure** Flexible  
**Power** 9.6W/m-17W/m  
**Correlated Colour Temperature\*** 2700-6000k/RGB/RGBW  
**Dimming** 0-10v/DMX512/DALI  
**Maintenance Category** IP20/IP65  
**Colours** White, Black, Anodised Aluminium, Custom

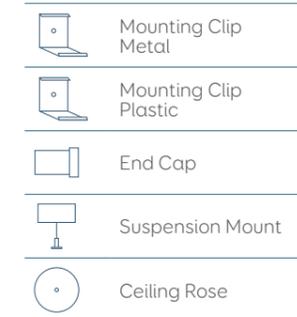



## UDON 8

Udon 8 is the ultimate in creative freedom with flexible PVC based sheathing allowing for curved lines of light. Udon 8 provides direct and indirect illumination using single CCT colours.

### TECHNICAL FEATURES

- Optics** Opal
- Light Distribution** Direct/Indirect
- Light Source** Epistar LED
- Linkable for continuous runs up to 30m** (powered both ends)
- Luminaire Efficacy** 80-90 lm/W
- Chromaticity Tolerance (initial MacAdam)** 4
- Colour Rendering Index min.** 80
- Rated Median Useful Life\*** 50000h L70 at 25°C
- Ballast** Meanwell (5 Year Warranty)
- Maintenance Category** IP67

### CUSTOM FEATURES

- Mounting** Surface
- Cutting** Every 100mm
- Structure** Flexible PVC Casing
- Power** 12W/m
- Correlated Colour Temperature\*** 2700-6000k/R/G/B/Y/P
- Dimming** 0-10v/DMX512/DALI
- Colours** White



Suspension Kit



Surface Mount



End Cap



Power Connector



Mid Connector



Straight Connection



Aluminium Channel 1000m



Aluminium Channel 50m



## UDON 15

Udon 15 offers even more versatility with illumination via multiple CCT options including RGB and Pixel technology. Varied dimming systems cater to suit most commercial indoor and outdoor linear projects.

### TECHNICAL FEATURES

- Optics** Opal
- Light Distribution** Direct/Indirect
- Light Source** Epistar LED
- Linkable for continuous runs up to 30m** (powered both ends)
- Luminaire Efficacy** 80-90 lm/W
- Chromaticity Tolerance (initial MacAdam)** 4
- Colour Rendering Index min.** 80
- Rated Median Useful Life\*** 50000h L70 at 25°C
- Ballast** Meanwell (5 Year Warranty)
- Maintenance Category** IP67

### CUSTOM FEATURES

- Mounting** Surface/Recessed/Suspended
- Cutting** Every 100mm
- Structure** Flexible PVC Casing
- Power** 14W/m (Single CCT) 16W/m (RGB) 18W/m (Pixel)
- Correlated Colour Temperature\*** 2700-6000k/R/G/B/Y/P/RGB/Pixel
- Dimming** 0-10v/DMX512/DALI
- Colours** White



Suspension Kit



Surface Mount



End Cap



Power Connector



Mid Connector



Straight Connection



Aluminium Channel 1000m



Aluminium Channel 50m



/ creative light /  
TYKE

NOVII

17B Pollen St, Grey Lynn, Auckland 1021, New Zealand  
info@novii.co.nz | 0800 663 353 | novii.co.nz